




Ceramic Architectural Series

- High visible light transmission providing excellent aesthetics
- Non-metalized film with natural tone for amazing clarity
- Up to 91% infrared rejection (IR) providing energy savings and enhanced comfort*

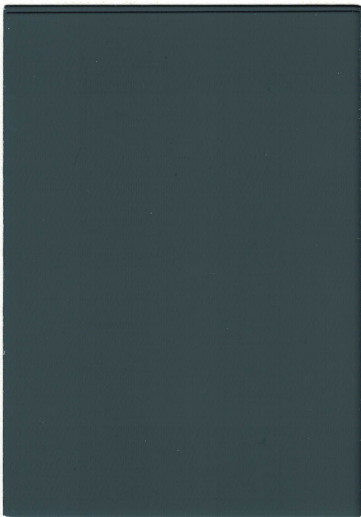

| CA35





| CA45



| CA60

*IR Rejection measured in-house from 900-1000nm

Product Performance and Technical Data

Glass Type (All 1/4")	Film Type	Visible Light			Total Solar Energy Rejected	Solar Heat Gain Coefficient	U Value	UV Light Rejected	Glare Reduction
		Reflected	Reflected	Transmitted					
Clear 	CA35	6%	6%	37%	55%	0.45	1.02	99.8%	58%
	CA45	6%	6%	45%	52%	0.48	1.06	99.8%	49%
	CA60	7%	7%	62%	48%	0.53	1.06	99.7%	30%
Tinted 	CA35	5%	6%	22%	60%	0.40	1.02	99.8%	58%
	CA45	5%	5%	27%	58%	0.42	1.06	99.9%	49%
	CA60	6%	6%	37%	55%	0.45	1.06	99.8%	30%